



HORMAN COMPANY

P. O. BOX 34-141 TAIPEI

7F, NO.33 FUHSING N. ROAD, TAIPEI, TAIWAN.

TEL : 886-2-2752-7198

FAX : 886-2-2772-6108


http : //www.horman.com.tw

E-mail : info@horman.com.tw

MTQ-2 Series MATV Tap

Features:

- 2 way MATV tap 5-1000MHz
- Available tap value: 8, 10, 12, 16, 20, 24, 27, 30 (dB)
- RoHS conform

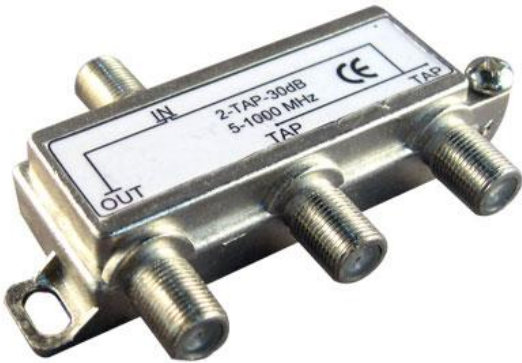

Specification:

P/N	Tap Value (dB)	Tap Loss	Insertion Loss In-Out (Max. dB)		Return Loss In/Out/Tap (Min. dB)				Isolation Out-Tap/Tap-Tap (Min. dB)			
			5	47	5	47	750	1000	5	47	470	750
			-	-	-	-	-	-	-	-	-	-
	1000		47	1000	47	470	750	1000	47	470	750	1000
MHz												
MTQ - 208	8dB	8±1.5	3.5	4.5	18/18/18	18/18/18	18/18/18	18/18/18	30/28	37/25	35/20	30/20
MTQ - 210	10dB	10±1.5	2.0	2.5	15/18/16	15/18/18	15/18/18	15/18/18	33/25	29/22	26/21	26/21
MTQ - 212	12dB	12±1.5	1.5	3.0	15/20/20	15/20/20	15/20/20	15/20/20	35/32	31/22	28/20	28/22
MTQ - 216	16dB	16±1.5	1.5	2.0	19/20/19	19/21/21	18/20/20	19/20/20	38/33	34/25	30/25	28/25
MTQ - 220	20dB	20±1.5	1.0	1.2	18/18/18	21/21/21	20/20/20	20/20/20	35/25	35/25	35/25	33/23
MTQ - 224	24dB	24±1.5	1.0	1.2	20/20/20	20/20/20	20/20/20	20/20/20	50/29	36/25	35/25	33/23
MTQ - 227	27dB	27±1.5	1.5	1.5	20/20/20	20/20/20	20/20/20	20/20/20	28/18	28/18	28/18	28/18
MTQ - 230	30dB	30±1.5	1.5	1.5	20/20/20	20/20/20	20/20/20	20/20/20	35/20	35/20	28/20	28/20